

Guardian™

Lifebuoy Housing

Guardian lifebuoy housings offer the ideal protection for life rings. These easily recognisable lifebuoy stations can house 600mm (24") or 750mm (30") life rings.

Technical Features


- Durapol® construction withstands extreme temperature and protects contents from UV degradation.
- Vandal- and theft-resistant design reduces the need for lifebuoy replacement.
- Choice of two housing sizes to suit different lifebuoy requirements.
- Ropemaster™ quick-release rope management system for rapid deployment.
- Lifebuoys supplied with a 30m throwing rope (8mm diameter) as standard.
- Strong knuckle hinge with corrosion-resistant GRP hinge rod.
- Water seal and equipment protection lip help minimise water ingress.
- Toggle latch helps prevent accidental door opening in harsh conditions.
- Durapol inspection indicator enables quick visual inspection.
- Choice of post, rail or wall mounting.
- Clear graphical usage instructions.
- Colours
Housing: Red
Lifebuoy: Orange




Specifications

Height	Guardian 600: 925mm
	Guardian 750: 1065mm
Height with surface-mounted post	Guardian 600: 1646mm
	Guardian 750: 1716mm
Width	Guardian 600: 773mm
	Guardian 750: 898mm
Depth	250mm
Weight	Guardian 600: 8.48kg
	Guardian 750: 10.76kg
Housing Material	Durapol® (Contains recycled material)
Fixings Material	Stainless Steel
Post Material	Armortec®-coated mild steel
Contents	Guardian 600: 1 × 600mm buoy
	Guardian 750: 1 × 750/600mm buoy
Fixing options	Wall mounting fixing Kit Rail mounting fixing Kit Concrete-in extended post with fixings Surface-mounted post with fixings


GUARDIAN 600

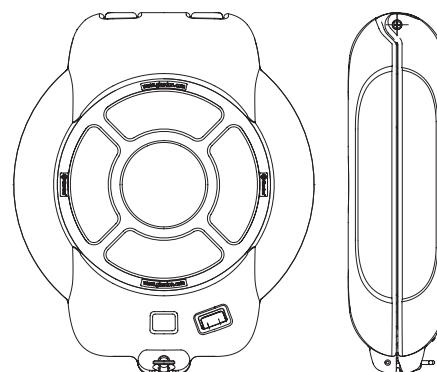


GUARDIAN 750

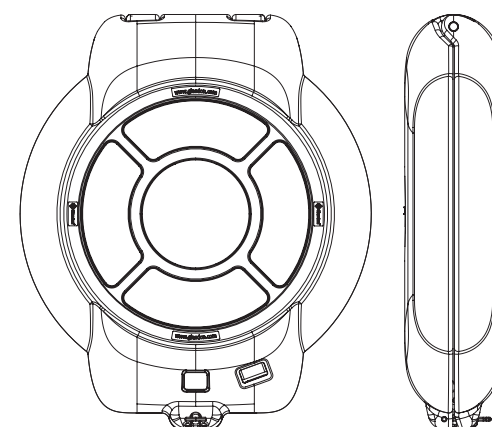

Optional Extras

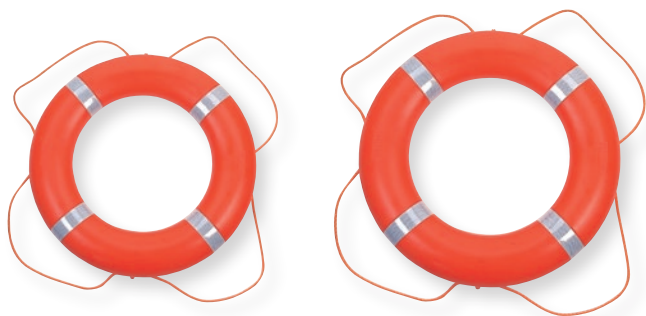

600mm or 750mm lifebuoy
Drop-tested to over 30m; 750mm model compliant with SOLAS LSA Code requirements.



External instruction sticker
Personalisation available



Lifebuoy throwing rope
 30 or 50m long, 8mm or 10mm diameter



Polycarbonate inspection window



Lid stay kit with sprung lock

Delivery

- Supplied without fixings as standard; choose the required wall, rail or post fixing option.
- Express delivery available.