Glasdon

5 YEAR WARRANTY

Glasdon Morpeth™
Bollard

Glasdon Morpeth bollard is a modern, flexible alternative to traditional cast iron and polyurethane Morpeth bollards, making it ideal for new schemes and extensions to existing installations.

Technical Features


- Traditional Morpeth style.
- Compact, shallow-depth installation.
- Slim diameter for space-constrained locations.
- Durable and low maintenance.
- Choice of self-righting or rigid models.
- Available with Compact LockFast™ Socket System or permanent, below-ground, extended base fixing.
- High-gloss black finish.
- Recessed reflectors protected during drive-through collisions.
- Tapered stem with drainage recesses.
- PVC anchor pin and moulded anchor supports for excellent anchorage during drive-through collisions.
- Colour
  Black




*Rebound Impactapol model only.

Specifications

Height above ground	1000mm
Maximum diameter	145mm
Depth below ground	225mm (w/ extended base)
	245mm (w/ socket)
Recommended hole size	Length and width: 350 × 350mm
	Depth: 225mm (w/ extended base) 295mm (w/ socket)
Bollard weight	3.5kg (Durapol model)
	3.2kg (Impactapol model)
Socket weight	1.4kg
Bollard material	Rigid model: Durapol®
	Rebound model: Impactapol®
Socket material	Durapol
Fixing options	Below-ground, extended base Compact LockFast™ socket

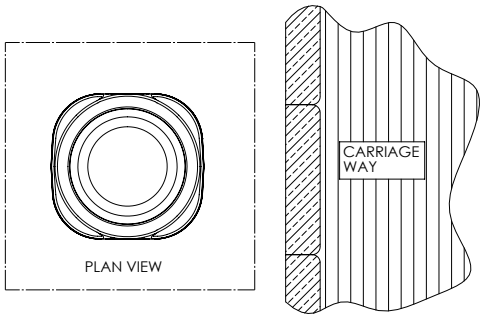

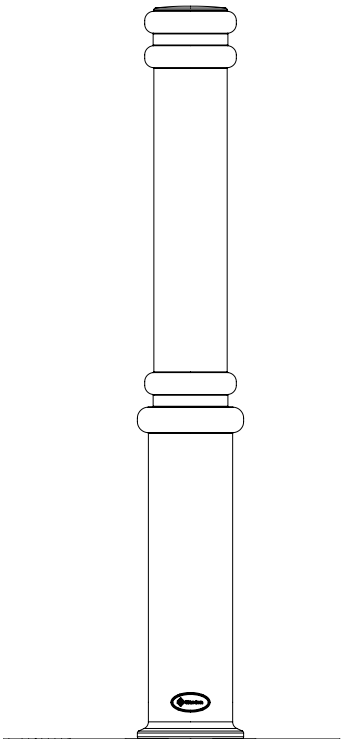

Optional Extras

BANDING KITS*



15mm decorative banding
(Gold)



15mm retroreflective banding
(Red/white, red, white, amber)



150mm retroreflective banding
(Red/white, red, white, amber)



414mm retroreflective banding
(Red/white, amber)



Stainless-steel locking blanking plate.
For use with Compact LockFast™ socket.

*The 15mm banding kits are available as single bands or pairs and can be used in conjunction with the 150mm and 414mm banding kits.

© Glasdon 11/2026
GX492/00/LP